

MWE SCHIEBETÜR DUPLEX S

ST.1017.DS

Premium Edition





DUPLEX S ST.1017.DS

Premium Edition

The Duplex S system is a fascinating evolution of the Duplex line.

It was designed for similar applications, but the hardware here can be mounted onto the top of the door rather than its surface.

Duplex S is suitable for very heavy wooden or metal sliding doors featuring specially crafted surfaces (not to be used with glass doors).

Door weight max. 190 kg

Technical details:

You will find further information all the technical details for this product


www.mwe-tuersysteme.de

More about MWE and all products


www.mwe.de

Overview:

- + Suitable for very heavy wood doors
- + Attached to or countersunk in the top edge of the door leaf
- + Door leaf thickness between 30 mm and 90 mm
- + MWE soft stop technology
- + Door leaf weight up to 190 kg





Technical highlights from Duplex S sliding doors with top rollers

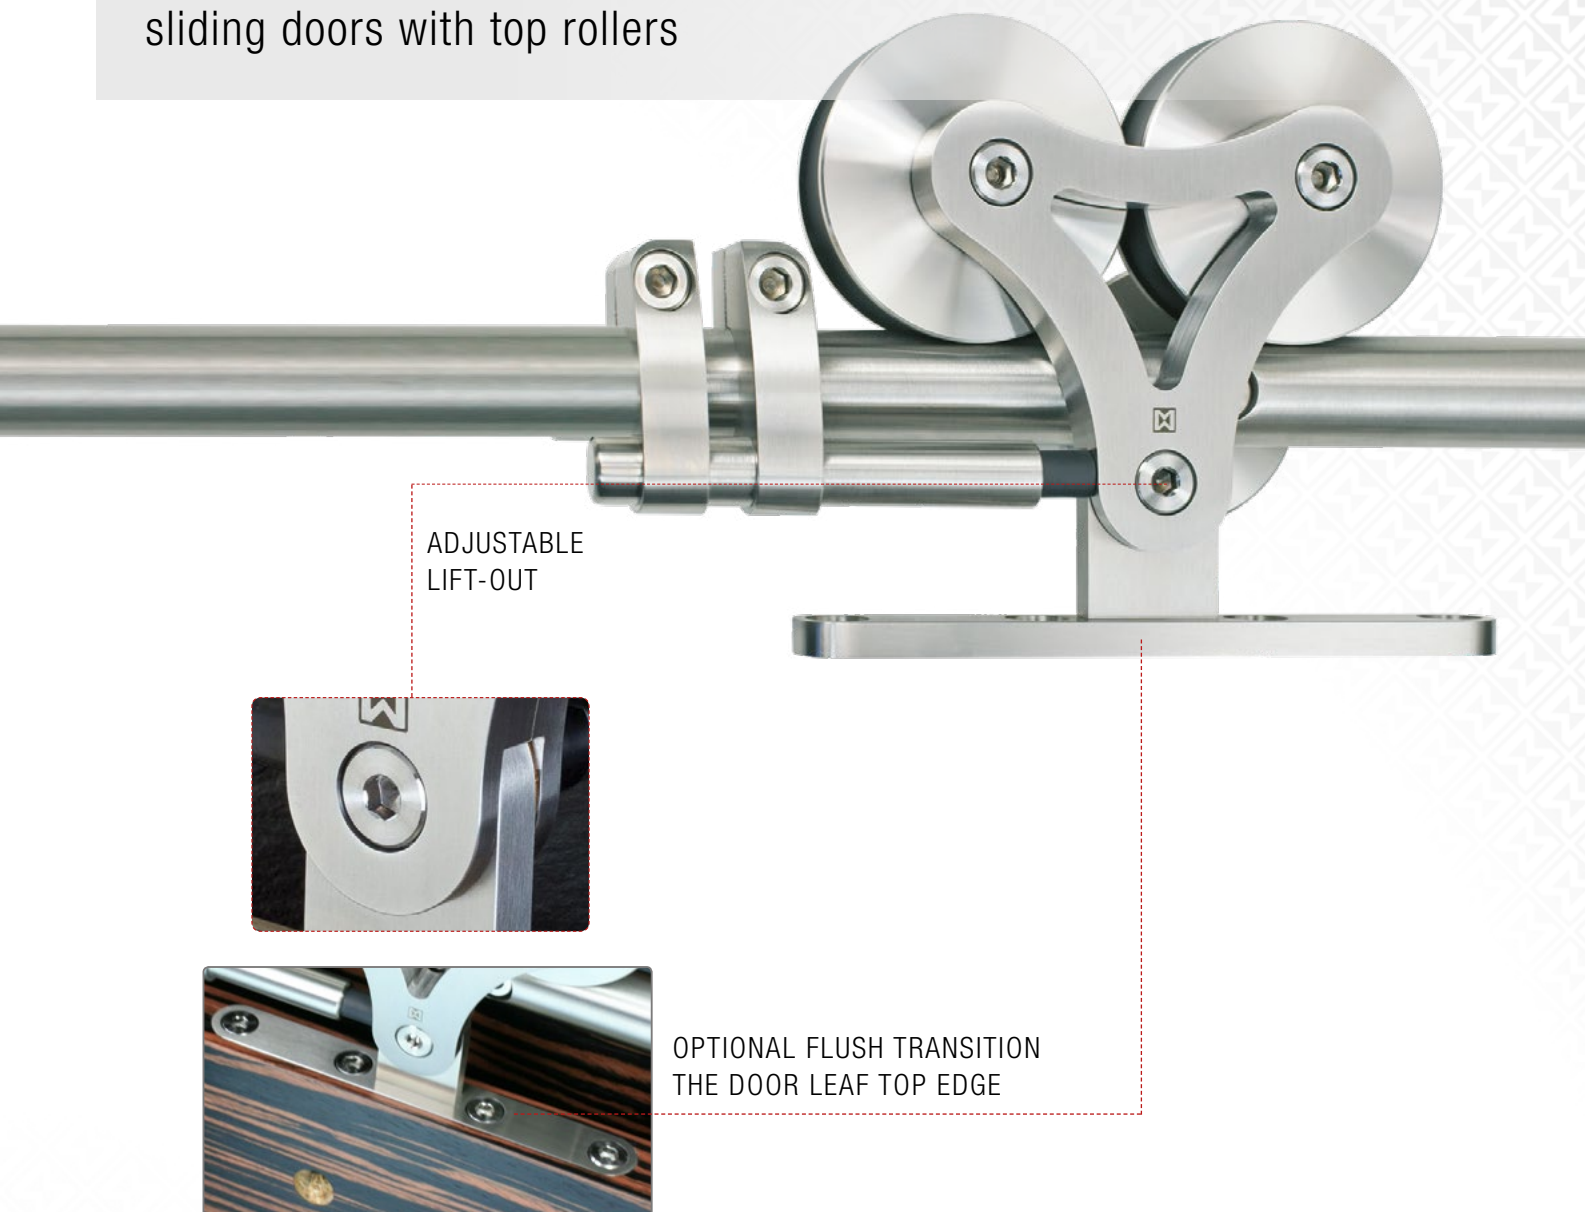


RAILS MADE OF SOLID STAINLESS STEEL

- + Virtually silent running, solid material does not generate resonances
- + High load capacity of the entire construction (e.g. for partition walls, glass cabins, skylights)

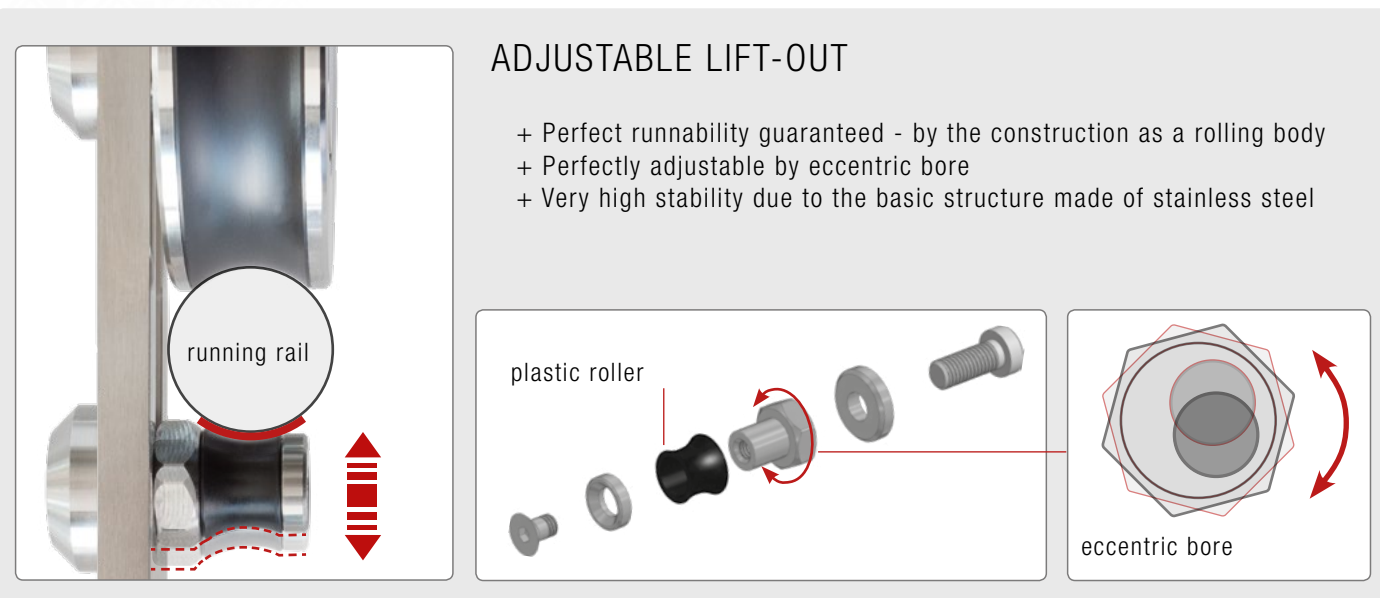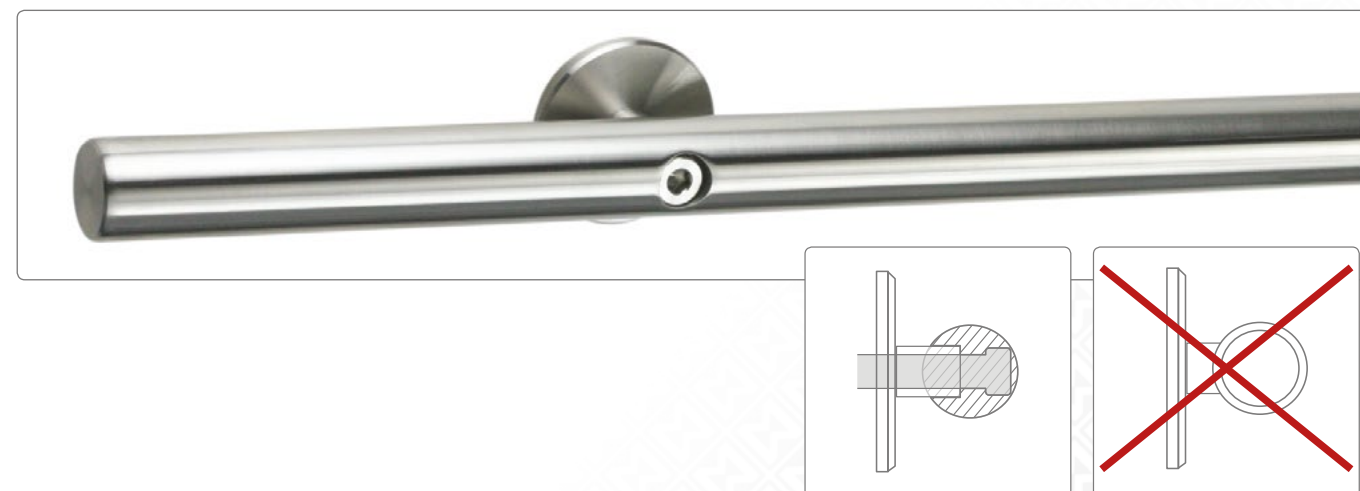

ST.2000

Round Rail Ø 25 mm

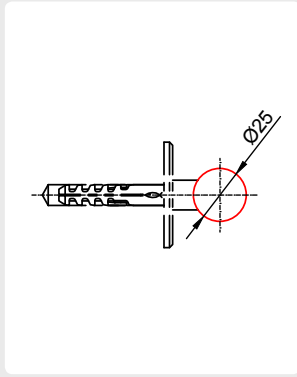


Ø 50 mm wall rosette

for sliding systems: ProTec, Klassik, Supra, Twin, Duplex, Duplex S, Vario, Spider and Chronos – incl. Drilling


ST.3600

MWE-Soft-Stop for Round Rail Ø 25 mm

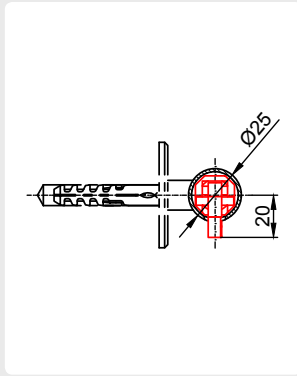


for sliding door systems: ProTec, Klassik, Supra, Duplex, Duplex S, Twin, Spider and Chronos

Wall Mount for Round Rail

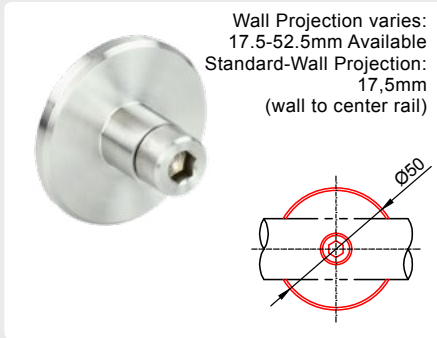


ST.2100

Glass Mount for Round Rail

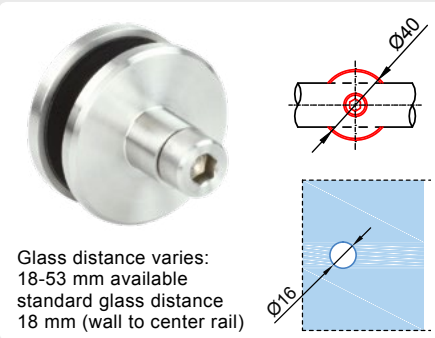


ST.2170

Glass Mount for Double Round Rail

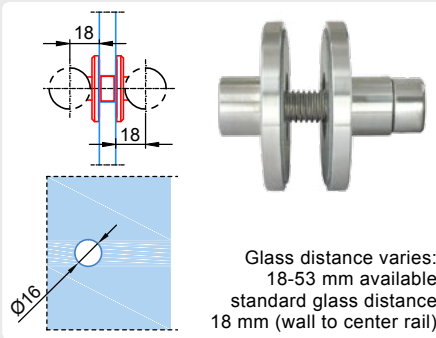


ST.2174

Wall Mount for Round Rail

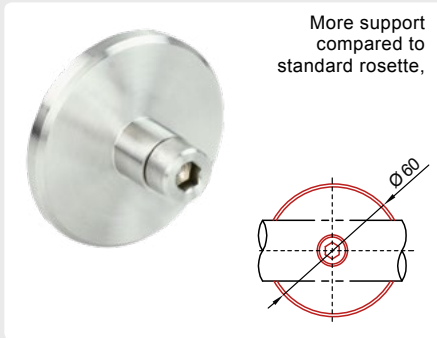


ST.2100.60

Wall Mount for System Spider

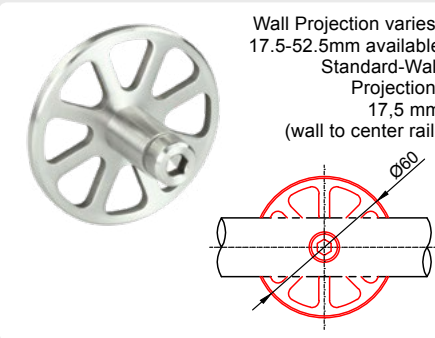


ST.2100.SP

Wall Mount for System Chronos

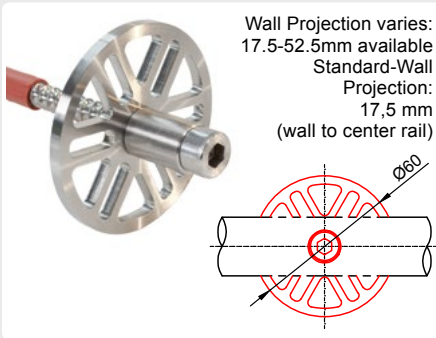


ST.2100.CH

3pcs. set wall shims, 1/2/3 mm

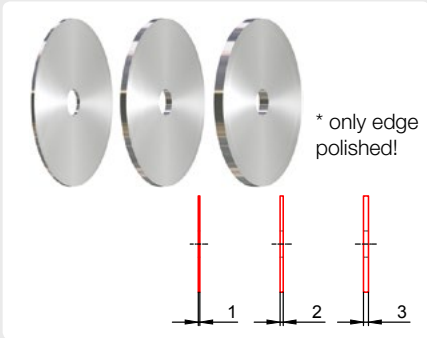

ST.2050


Ceiling Mount with height adjustability

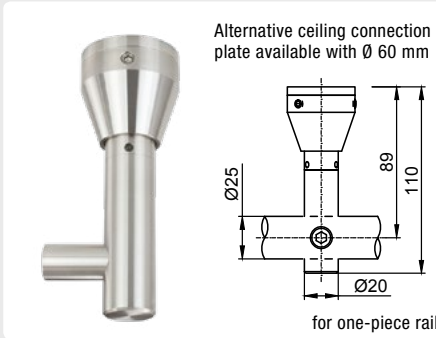

ST.5001

+/- 4 mm Height adjustment after assembly!

Ceiling Mount without height adjustability

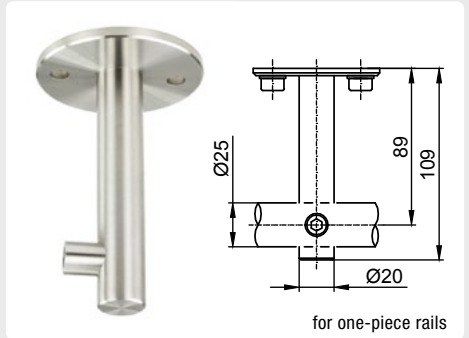

ST.5003


Corner rail connector



ST.2090.V

With angle adjustment!


Connector for multi-part rail

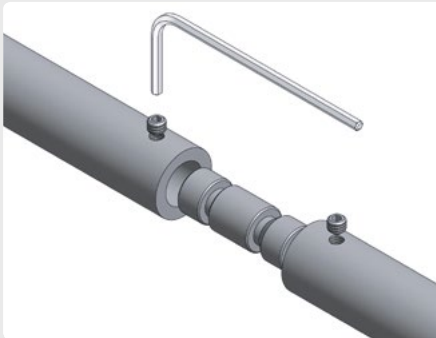

ST.2025


or Ø 25 mm Rail

Front end rail mount - for perpendicular walls

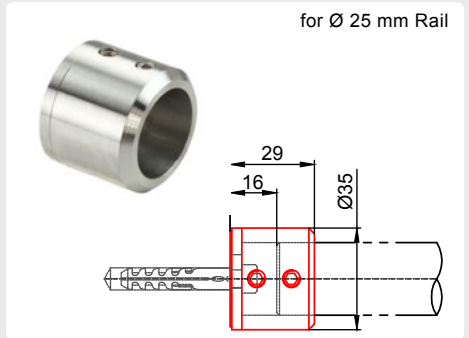


ST.5035

Offset distance of 16 mm required

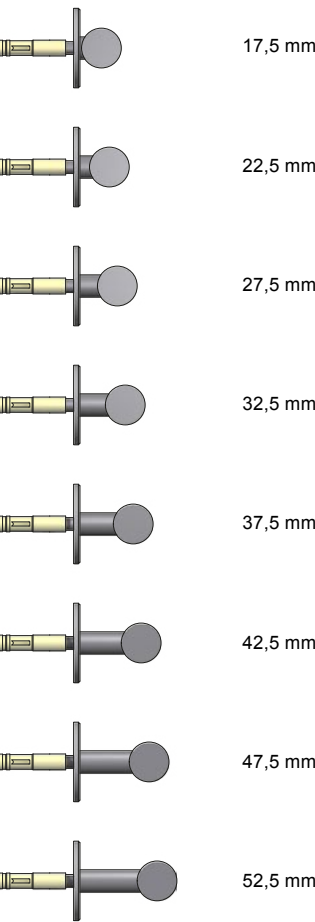

Various projection lengths are available to allow for baseboard and/or casing available in 5 mm increments!

Wall projection!
Standard wall projection 17.5 mm
(wall to center rail) 17.5-52.5mm available

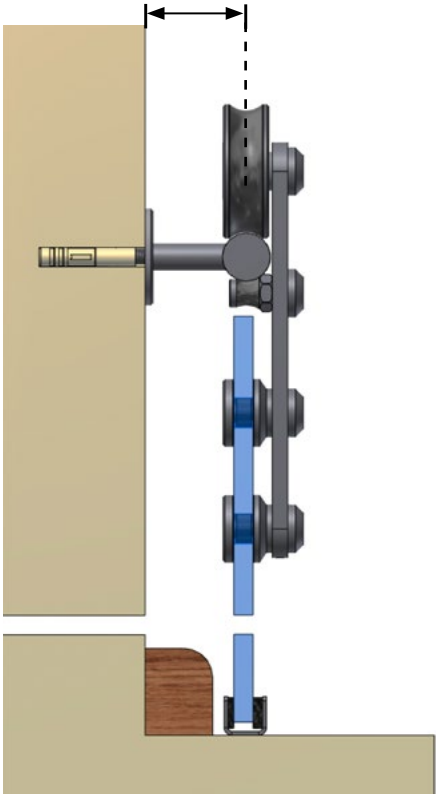

Wall mounting screws - wood thread with cylinder head!

NEW!



Standard Wall mount (included in the wall to center rail): M8 cylinder head bolt ZK8.100.HD with wood thread, Fischer-UX Ø 10 mm, 80, 100 and 120 mm



Alternative Wall mount Screws:
M8 cylinder head bolt with metric thread and gypsum wall metal dowel. for single or double plasterboard - please specify!

